



MESO-H

## MESO-H

# Universal HART-compatible 2-wire Transmitters



MESO-H/-HX are smart and universal 2-wire in-head transmitters for temperature and other measurement applications. MESO-H/-HX are fully HART-compatible, with communication through the HART protocol.


- Utilizes HART Protocol for remote configuration and monitoring
- Communicates with HART Communicator or PC via modem
- Fully universal, linearized and isolated
- Accepts RTD, T/C, mV and  $\Omega$
- Sensor error correction
- Easy wiring, large center hole
- 50 point linearization – any sensor can be matched
- Consistent sensor break function
- Full access to all features while in operation
- Low sensor isolation detection
- MEPRO, easy-to-use Windows configuration software
- Integrated in Emerson AMS and Siemens PDM systems

## Specifications:


Input RTD and Resistance	3-,4-wire connection
Pt100 <sup>1)</sup> and D100 <sup>2)</sup>	-200 to +1000 °C / -328 to +1832 °F
Pt1000 <sup>1)</sup>	-200 to +200 °C / -328 to +392 °F
Pt X 10 ≤ X ≤ 1000 <sup>1)</sup>	Upper range depending on X value
Ni100 <sup>3)</sup>	-60 to +250 °C / -76 to +482 °F
Ni1000 <sup>3)</sup>	-60 to +150 °C / -76 to +302 °F
Potentiometer / resistance	0 to 2000 $\Omega$
Input Thermocouples	B, C, E, J, K, L, N, R, S, T, U
Input Voltage	-10 to +500 mV
Sensor failure / Low isolation	User definable output
Adjustments - Zero	Any value within range limits
Adjustments - Minimum spans	
Pt100, Pt1000, Ni100, Ni1000	10 °C / 18 °F
Potentiometer	10 $\Omega$
T/C, mV	2 mV
Output	4-20 / 20-4 mA
Operating temperature	-40 to +85 °C / -40 to +185 °F
Galvanic isolation	1500 VAC, 1 min
Power supply	MESO-H 10 to 42 VDC MESO-HX 12 to 30 VDC
Intrinsic safety	
MESO-HX ATEX:	II 1 G Ex ia IIC T4-T6
MESO-HX FM:	IS Class I-III, DIV 1, GP A-D, G
MESO-HX CSA:	Class I, Groups A-D; Class II, Group G; Class III
Typical accuracy	±0.1% of temperature span
Connection head	DIN B or larger

<sup>1)</sup>IEC 60751,  $\alpha=0.00385$  <sup>2)</sup>Pt100 acc. to JIS 1604,  $\alpha=0.003916$  <sup>3)</sup>DIN 43760


## Input connections

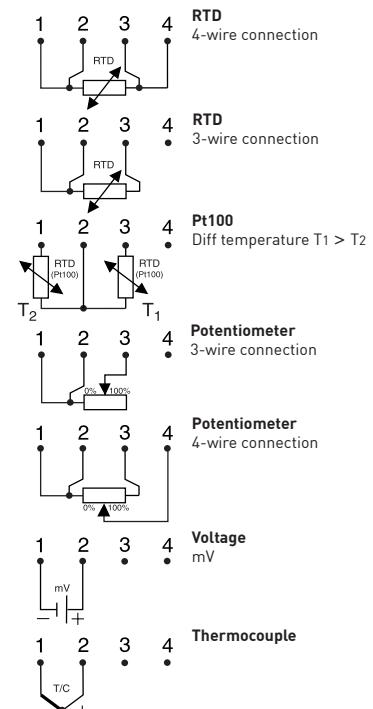

## Output connections

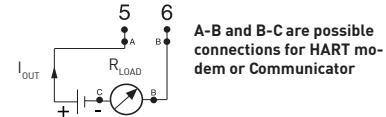


## Output load diagram

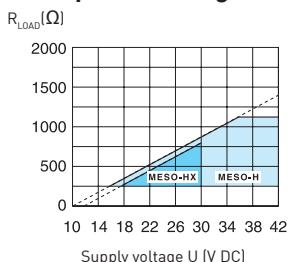

$$R_{LOAD} = (U-10)/0.023 \text{ (MESO-H)}$$

$$R_{LOAD} = (U-12)/0.023 \text{ (MESO-HX)}$$

## Dimensions

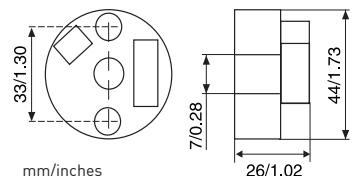

## Ordering information

MESO-H	70MEH00001
MESO-HX (ATEX)	70MEHX0001
MESO-HX (FM, CSA)	70MEHX1001
HART PC modem RS232	70MEM00001
HART PC modem USB	70MEM00003
Software CD	70CDSOFT01
Configuration	70CAL00001