


PRESSURE & DIFFERENTIAL PRESSURE MEASUREMENT



ECOM-UNO

- DIFFERENTIAL PRESSURE MEASUREMENT IN POCKET SIZE
- MEASURING RANGE 0-200 hPa
- 4 SWITCHABLE UNITS:
hPa | mmH₂O | PSI | mmHg
- WITH MAGNET FIXATION
- INCL. PROTECTION POUCH

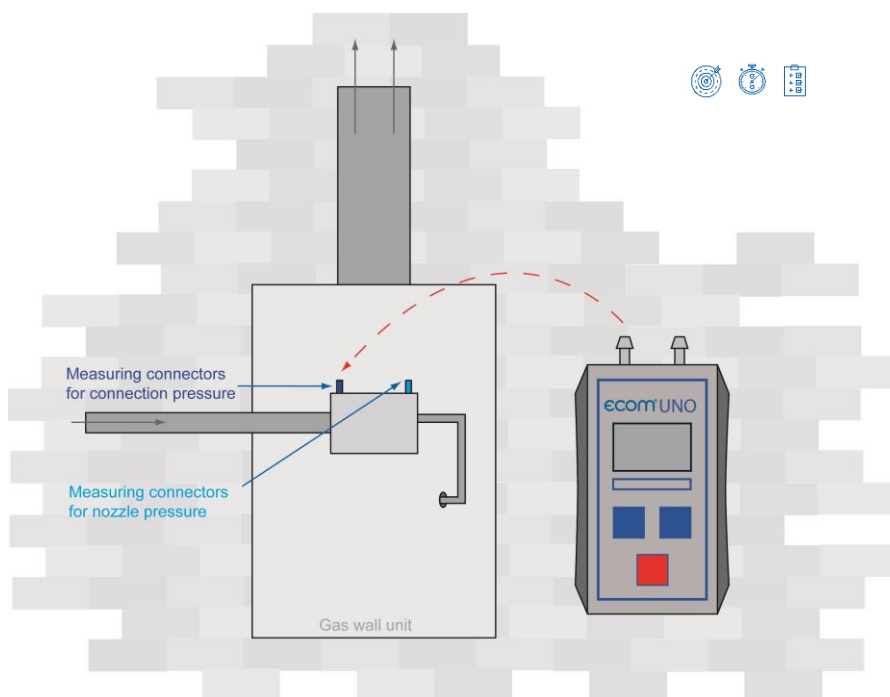

TECHNICAL DATA ECOM-UNO DIFFERENTIAL PRESSURE METER	
Applications:	Adjustment of gas burners: <ul style="list-style-type: none"> • Device connecting pressure (flow pressure) • Nozzle pressure (flow pressure) • Gas operation pressure (plant pressure) • Idle pressure
4 switchable units:	0- 200 hPa 0-2038 mmH ₂ O 0- 2,9 PSI 0-150 mmHg Automatic range switch
Measurement ranges:	0- 200 hPa 0-2038 mmH ₂ O 0- 2,9 PSI 0-150 mmHg
Resolution:	0,01 hPa 0,01 mmH ₂ O 0,01 PS 0,01 mmHg
Overload:	300 hPa 3060 mmH ₂ O 4,35 PSI 225 mmHg
Accuracy:	± 1% of measuring range end value
Warm-up time	approx. 3 minutes
Power supply:	2 one-way batteries type AA 1.5V (Mignon)
Power consumption:	approx. 20 mA
Storage temperature	20°C to +70°C
Operating temperature:	0°C to +40°C
Power supply:	2 one-way batteries type AA 1.5V (Mignon)
Positioning:	Integral magnet for positioning at metal surfaces
Dimensions:	Approx. 106 x 64 x 28 mm (4.1 x 2.5 x 1.1 in.)
Weight:	approx. 150 g (with batteries)
Delivery:	Incl. 2 silicone hoses, length approx. 70 cm (2.3 ft.) Incl. 2 reduction parts Incl. storage/protection pouch with belt loop Material / Colour: fabrics, black Dim.: approx. 160 x 120 x 45 mm (6.3 x 4.7 x 1.7 in.) Weight: approx. 50 g (1.7 oz.)

Item no. 102108

ECOM® PRODUCTS – YOUR PARTNERS FOR:

BURNER DIAGNOSIS GAS LEAK DETECTION
FLUE GAS ANALYSIS PRESSURE MEASUREMENT

FIND YOUR ECOM® SALES
POINT AND DEALER ON:
www.ecom.de



ecom-UNO in real size